


Heating Green - IR heaters and sprinkler head clearance.

2/22/2019

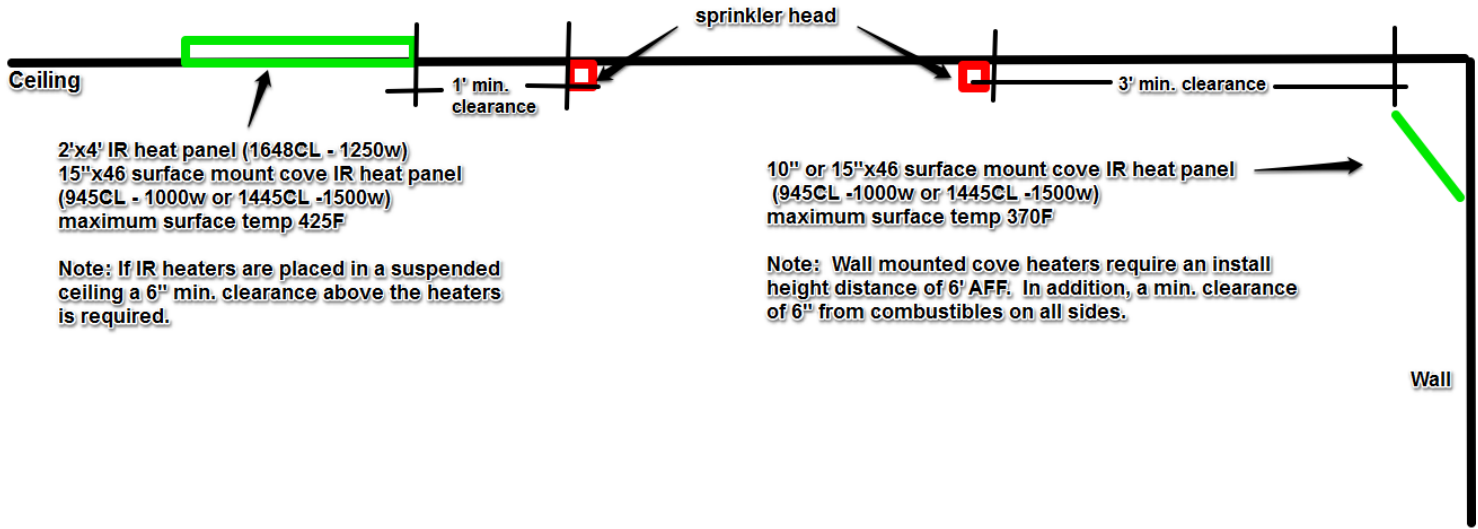

2'x4' IR heat panel (1648CL - 1250w)
15"x46 surface mount cove IR heat panel
(945CL - 1000w or 1445CL -1500w)
maximum surface temp 425F

Note: If IR heaters are placed in a suspended ceiling a 6" min. clearance above the heaters is required.

10" or 15"x46 surface mount cove IR heat panel
(945CL -1000w or 1445CL -1500w)
maximum surface temp 370F

Note: Wall mounted cove heaters require an install height distance of 6' AFF. In addition, a min. clearance of 6" from combustibles on all sides.