



Painting Instructions For The ILO Plug-In Heating Panels


To ensure that your painting project goes well and lasts a long time, we recommend that you follow the instructions below.

- 1. Make sure that the heater is unplugged and at room temperature.**
- 2. Wipe down the heater with mild soap and water, wipe dry and also let it air dry.**
- 3. Apply one coat of ACRYLIC paint primer and let it completely dry.**
- 4. Apply a second coat of ACRYLIC paint primer and let it completely dry.**
- 5. Apply a finish coat of ACRYLIC paint and let it dry completely.**
- 6. And a second coat of ACRYLIC paint (if necessary) and let it completely dry.**

Please note that the ACRYLIC paint will not affect the performance of the heater. Results of the finish and longevity of the paint may vary from use and time.

In our experience, we have not seen paint discoloration, etc. from use with the infrared heating panel.

Here are some examples of what we have done:

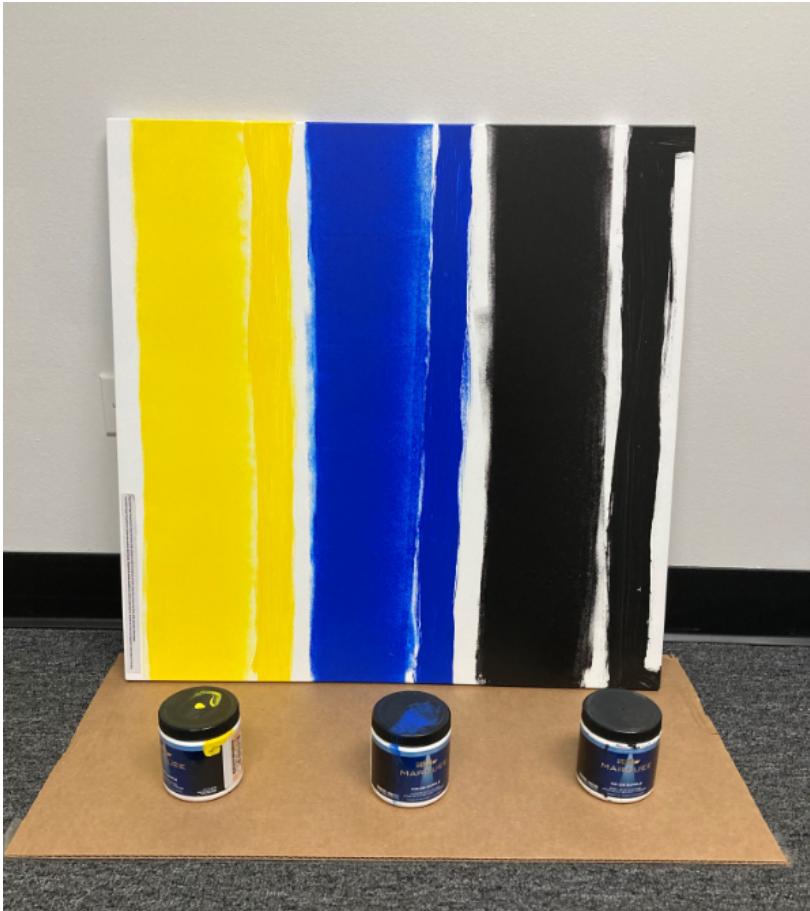

Enjoy your heater and your painting experience!

