

Part 1:

Cord Installation

1. Lay heater face down on table surface.

Pro tip: You may want to lay a towel down on table first to avoid scratching the surface.

2. Locate the metal box on the back of the heater. (**figure 1**)

3. Unscrew the box from the back of the heater.

4. Using a screwdriver punch out one of the knockouts (circles on end & top) – will require some force. (**figure 2**)


a. **Note:** it is best to remove the knockout that will allow you the maximum cord length, i.e. from the bottom of the stand.

Pro tip: take off lever nuts before feeding them through the connector piece and knockout box.

Figure 1



Figure 2

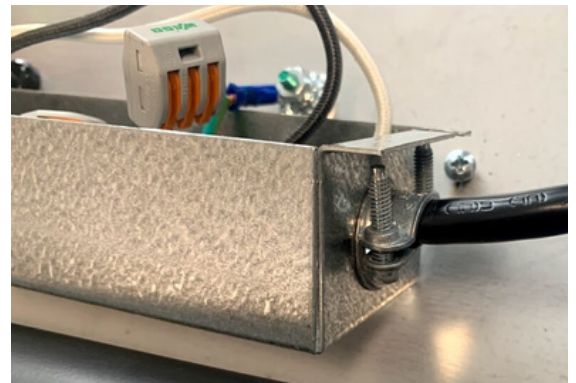

Part 1: Cord Installation

5. Insert metal connector piece in the knockout (found in bag with screws) (**figure 3**)

6. Feed cord through metal piece/knockout, leaving enough cord (about 3 inches) to tighten down on and to affix the wire to the leads

7. Put black cord in blue lever nut and white cord in brown lever nut; close (**figure 4**)

8. Attach green wire to the green ground screw on heater.

9. Tighten down strain relief on the knockout

10. Reattach box to heater using screws.

11. Plug-in and confirm heater turning on before proceeding with mounting.

Figure 3

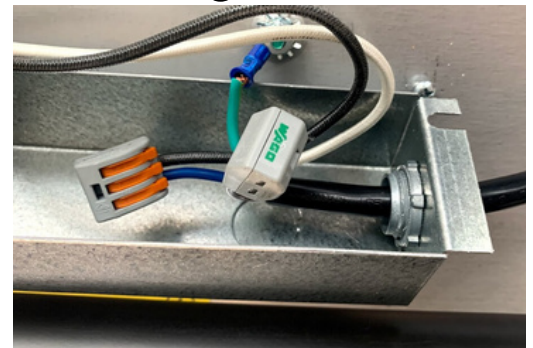


Figure 4

